

FlameGuard[®] Technical FlameGuard[®] QuickTorque[™] SR Gasket Sealed, Special Reinforced Sprinkler Head Adapter with Metal Threads

QuickTorque[™]




Spears[®] FlameGuard[®] QuickTorque[™] CPVC Sprinkler Head Adapter uses a combination of high-strength materials to provide the most reliable, worry-free adapter in the industry:

> CPVC Body for Unsurpassed Corrosion Resistance High grade EPDM Gasket for Reliable Sealing Metal Thread & Exterior Reinforcement for Superior Strength

The thread design and gasket seal eliminate radial stress found in tapered thread joint make up, the gasket compresses to allow sprinkler frame alignment without over-tightening.

4235-101GMR 3/4"x1/2" 4235-130GMR 1"x1/2"

- ✓ Metal Thread Eliminates Cross Threading
- Requires NO Thread Sealant
- ✓ High Grade EPDM Compression Gasket Allows Quick, Easy Head Alignment
- Easiest Installation, Finger Tight Plus 1-Turn Then Align Sprinkler Head
- ✓ NSF_® Certified Lead-Free for Use in Potable Water Systems - Suitable for Use in Multi-purpose Systems

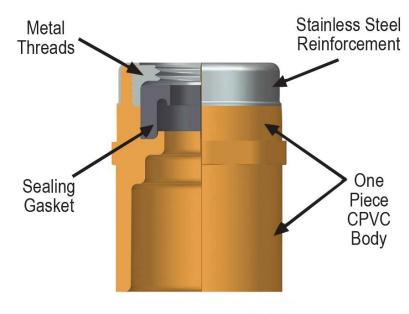

Progressive Products From Spears[®] Innovation & Technology

QuickTorque™ Female Sprinkler Head Adapter - Gasket Sealed Metal Thread Style.

Page 73



