


INNOFLUE® SINGLE WALL COMPONENTS

Eccentric Increaser


Transitions vent system to a larger diameter. Install in horizontal or vertical orientation. Other size combinations available upon request.



Nominal Diameter	Part #	Overall Length "A"	Effective Length "B"	Max O.D. "C"
4"/5" (110/125)	ISEI0405	6.7 (170)	4.2 (106)	5.7 (145)
5"/6" (125/160)	ISEI0506	7.2 (185)	4.3 (108)	7.3 (185)
6"/8" (160/200)	ISEI0608	10.4 (265)	6.5 (165)	8.8 (224)
8"/10" (200/250)	ISEI0810	11.8 (300)	7.8 (200)	10.8 (273)
10"/12" (250/300)	ISEI1012	20.2 (514)	7.8 (200)	13.8 (351)


Reducers

Transitions vent system to a smaller diameter.



Nominal Diameter	Part #	Overall Length "A"	Effective Length "B"	Max O.D. "C"
3"/2" (80/60)	ISRD0302	6.0 (153)	3.5 (89)	3.2 (82)
4"/3" (110/80)	ISRD0403	6.0 (153)	3.5 (89)	4.3 (110)
5"/4" (125/110)	ISRD0504	6.5 (166)	4.0 (102)	5.9 (150)
6"/4" (160/110)	ISRD0604	6.5 (166)	4.0 (102)	6.3 (160)
6"/5" (160/125)	ISRD0605	6.5 (166)	4.0 (102)	7.2 (183)
8"/6" (200/160)	ISRD0806	8.0 (204)	5.2 (133)	7.9 (201)
10"/8" (250/200)	ISRD1008	9.2 (234)	5.2 (133)	9.9 (252)
12"/10" (315/250)	ISRD1210	17.9 (455)	14.0 (356)	12.5 (318)

Test Ports

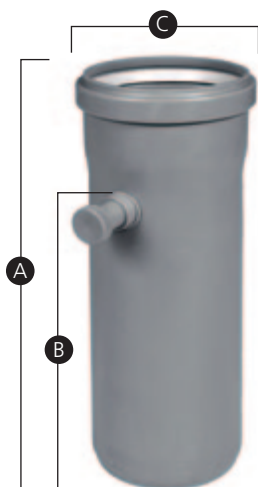

Test Ports

Installed immediately above the appliance, the test port allows maintenance professionals to sample flue gases and ensure the appliance is operating at optimum efficiency.

Nominal Diameter	Part #	Overall Length "A"	Effective Length "B"	Max O.D. "C"
2" (60)	ISTP02	7.0 (170)	4.3 (110)	3.0 (75)
3" (80)	ISTP03	7.0 (170)	4.5 (115)	3.7 (95)
4" (110)	ISTP04	12.4 (314)	9.8 (250)	5.1 (128)
5" (125)	ISTP05	12.6 (320)	9.8 (250)	5.8 (146)
6" (160)	ISTP06	12.7 (323)	9.8 (250)	7.3 (185)
8" (200)	ISTP08	15.9 (405)	12.0 (305)	8.8 (224)
10" (250)	ISTP10	15.9 (405)	12.0 (305)	10.7 (273)
12" (315)	ISTP12	36.7 (932)	24 (610)	13.8 (351)