

5

4

3

2




1

C

B

C

B

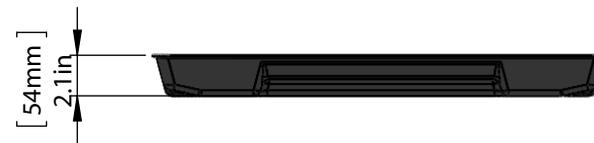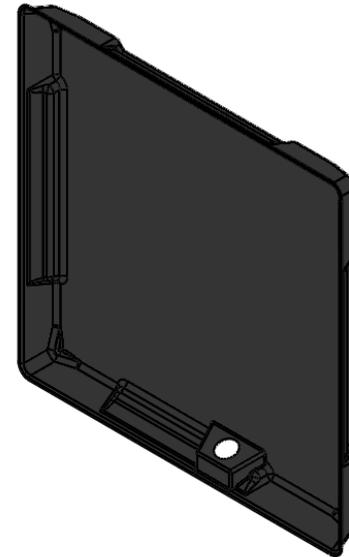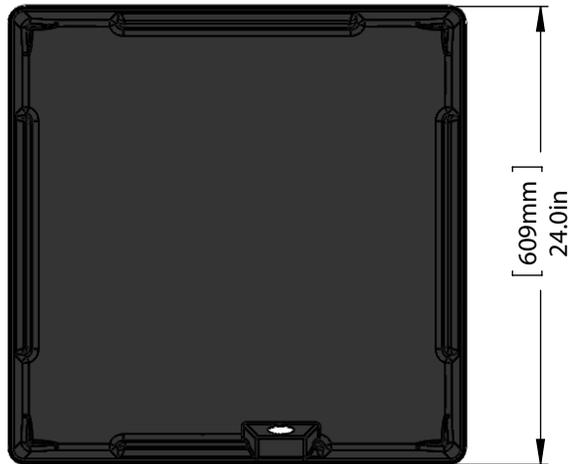

**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:	PROPRIETARY AND CONFIDENTIAL
DIMENSIONS ARE IN INCHES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RECTORSEAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RECTORSEAL IS PROHIBITED.
TOLERANCES:	
FRACTIONAL ±.032	
ANGULAR: MACH ±.5° BEND ±2°	
TWO PLACE DECIMAL ±.010	
THREE PLACE DECIMAL ±.005	
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5, 1994	

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	4/6/10
CHECKED BY ENG.	JK	4/6/10
ENG APPR.	CC	4/6/10
MFG APPR.	CC	4/6/10



2601 Spenwick Drive,  
Houston, TX 77055  
800-231-3345

**TITLE:**

**AG-T 24x24 SPECIFICATION SHEET**

SIZE  
**A**

SCALE: 1:10

SHEET 1 OF 1

5

4

3

2

1

A