For Residential and Commercial Applications

Job Name:	Engineer/Architect:
Job Location:	Wholesaler:
Submittal Date:	Contractor:

CS40X / CS40BX Multi-Turn Sweat Angle Stop w/ 5" Extension (Optional Loose Key)

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT[™] series ball stop supply kits.

Design Features:

- Machined one-piece brass body provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins

•	Oval knurled handle	provides a s	secure grip	and smooth	on/off c	peration
	Ø					

Operating Specifications:

Temperature: 40°- 160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS			
Body	Brass, plated		
Stem	Brass, plated		
Handle	Zinc die cast, plated		
Handle Screw	Steel, zinc plated		
Bib & Packing Washer	Rubber		
Packing Nut	Brass, plated		
Compression Nut & Sleeve	Brass		
Sweat Extension	Copper, plated		
Escutcheon	Steel, plated		
Loose Key	Zinc die cast		
Loose Key Adaptor	Brass, plated		
Lock Shield	Brass, plated		

THE USA WAS A STREET OF THE ST

Part Listing:

	CS40X C	1/2" nom sweat x 3/8" OD compression, chrome
	CS40BX C	1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome
	CS40BX C1	1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome, window box
	CS40BX CD	1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome, carded
	CS40BX BRL	1/2" nom sweat x 3/8" OD compression, bell escutcheon, window box
	CS40BX BZ	1/2" nom sweat x 3/8" OD compression, bell escutcheon, oil-rubbed bronze
	CS40BX NP	1/2" nom sweat x 3/8" OD compression, bell escutcheon, polished nickel
	CS40BX NS	1/2" nom sweat x 3/8" OD compression, bell escutcheon, satin nickel
	SCS40X C	1/2" nom sweat x 3/8" OD compression w/loose key, chrome
П	SCS40BX C	1/2" nom sweat x 3/8" OD compression w/loose key, bell escutcheon, chrome


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.





CS40X / CS40BX Multi-Turn Sweat Angle Stop w/ 5" Extension (Optional Loose Key)

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
CS40X	1.02	5.46	1.70
CS40BX	1.02	5.46	1.70

PART DIMENSIONS (Inches)				
Model	DIM A	DIM B	DIM C	
SCS40X	1.02	5.46	1.46	
SCS40BX	1.02	5.46	1.46	

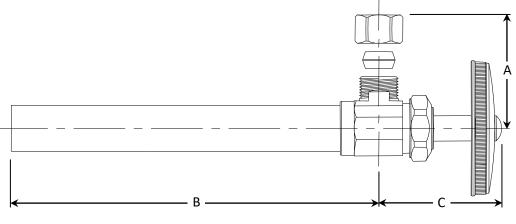

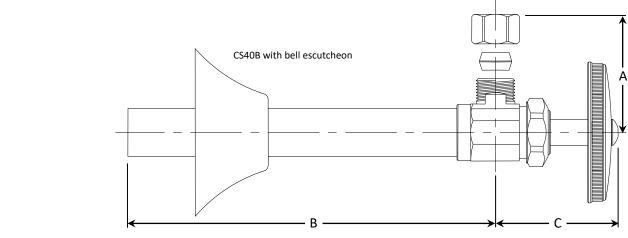

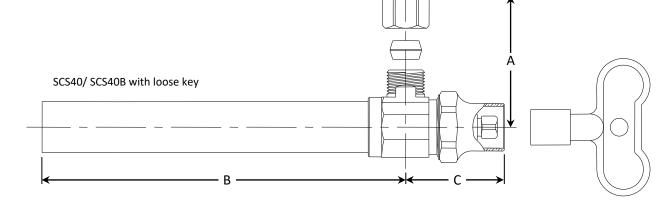

${\it Listings~\&~Certifications:}$

 IAPMO listed to ASME A112.18.1/CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)







This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

