



Job Name: _____

Job Location: _____

Contractor: _____

Engineer: _____

Approval: _____

Wal-Rich Brass Compression Couplings

Design Features:


- Lead Free* Brass Construction
- Imported

Operating Specifications:

Temperature: 180° F

Pressure: 125 psi

*The wetted surface of this product contacted by consumable water contains less than one quarter of a percent (.25%) of lead by weight.

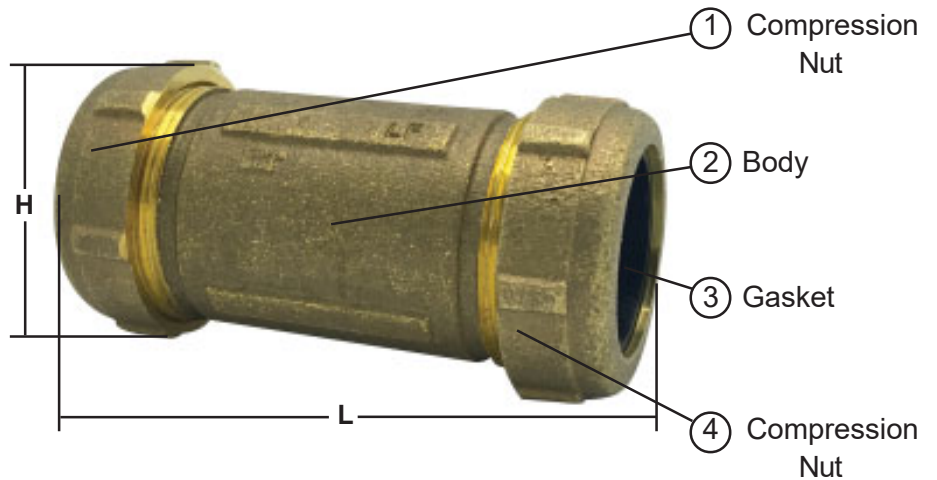

Material Specifications

No.	Part	Material
1	Compression Nut	Brass
2	Body	Brass
3	Gasket	EPDM
4	Compression Nut	Brass



Meets AB1953/NSF61G Standard

W-R#	IPS	CTS	L	H	Weight
4531000	3/8"	1/2"	Short - 3"	1.34	.334 lbs.
4531002	1/2"	3/4"	Short - 3"	1.56	.445 lbs.
4531004	3/4"	1"	Short - 3"	1.95	.756 lbs.
4531006	1"		Short - 3"	2.19	.783 lbs.
4531008	1-1/4"		Short - 3"	2.56	1.16 lbs.
4531010	1-1/2"		Short - 3"	2.80	1.30 lbs.
4531012	2"		Short - 3"	3.27	1.70 lbs.
4533000	3/8"	1/2"	Long - 5"	1.34	.501 lbs.
4532002	1/2"	3/4"	Long - 5"	1.56	.673 lbs.
4532004	3/4"	1"	Long - 5"	1.95	1.10 lbs.
4532006	1"		Long - 5"	2.19	1.20 lbs.
4532008	1-1/4"		Long - 5"	2.56	1.59 lbs.
4532010	1-1/2"		Long - 5"	2.80	1.80 lbs.
4532012	2"		Long - 5"	3.27	2.15 lbs.