

**Qty. Description**

1 **UPS 26-99 FC**



**Note! Product picture may differ from actual product**

Product No.: [52722512](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump has 3-step speed selector.

The pump is characterized by:

- \* Ceramic shaft and radial bearings.
- \* Carbon axial bearing.
- \* Stainless steel rotor can and bearing plate.
- \* Corrosion-resistant impeller, Composite.
- \* Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

**Liquid:**

Pumped liquid: Water  
Liquid temperature range: 35.6 .. 230 °F  
Selected liquid temperature: 140 °F  
Density: 61.35 lb/ft<sup>3</sup>

**Technical:**

Rated flow: 17.7 US GPM  
Rated head: 16.46 ft  
Approvals: CUL

**Materials:**

Pump housing: Cast iron  
EN 1561 EN-GJL-200  
ASTM A48-30B  
Impeller: Composite  
PES+30% GF

**Installation:**

Range of ambient temperature: 35.6 .. 104 °F  
Amb. max at 80 dgr C liquid: 176 °F  
Maximum operating pressure: 145.04 psi  
Type of connection: OVAL  
Pipe connection: 2-BOLT FLANGE  
Pressure rating for connection: PN 10  
Port-to-port length: 6 1/2 in

**Electrical data:**

Power input in speed 1: 0.2012 HP  
Power input in speed 2: 179 W  
Max. power input: 197 W  
Mains frequency: 60 Hz  
Rated voltage: 1 x 115 V  
Current in speed 1: 1.3 A  
Current in speed 2: 1.5 A  
Current in speed 3: 1.8 A  
Capacitor size - run: 20 µF/180 V



Company name:

Created by:

Phone:


Date:

31/10/2023

Qty.	Description																		
1	<table><tr><td data-bbox="79 224 446 257">Number of poles:</td><td data-bbox="446 224 1576 257">2</td></tr><tr><td data-bbox="79 257 446 291">Insulation class (IEC 85):</td><td data-bbox="446 257 1576 291">F</td></tr><tr><td data-bbox="79 291 446 324">Built-in motor protection:</td><td data-bbox="446 291 1576 324">CONTACT</td></tr><tr><td colspan="2" data-bbox="79 347 1576 380">Others:</td></tr><tr><td data-bbox="79 380 446 414">Terminal box position:</td><td data-bbox="446 380 1576 414">9H</td></tr><tr><td data-bbox="79 414 446 448">Net weight:</td><td data-bbox="446 414 1576 448">9.48 lb</td></tr><tr><td data-bbox="79 448 446 481">Gross weight:</td><td data-bbox="446 448 1576 481">10.2 lb</td></tr><tr><td data-bbox="79 481 446 515">Country of origin:</td><td data-bbox="446 481 1576 515">US</td></tr><tr><td data-bbox="79 515 446 537">Custom tariff no.:</td><td data-bbox="446 515 1576 537">8413.70.2005</td></tr></table>	Number of poles:	2	Insulation class (IEC 85):	F	Built-in motor protection:	CONTACT	Others:		Terminal box position:	9H	Net weight:	9.48 lb	Gross weight:	10.2 lb	Country of origin:	US	Custom tariff no.:	8413.70.2005
Number of poles:	2																		
Insulation class (IEC 85):	F																		
Built-in motor protection:	CONTACT																		
Others:																			
Terminal box position:	9H																		
Net weight:	9.48 lb																		
Gross weight:	10.2 lb																		
Country of origin:	US																		
Custom tariff no.:	8413.70.2005																		

## 52722512 UPS 26-99 FC 60 Hz

UPS 26-99 FC, 60Hz

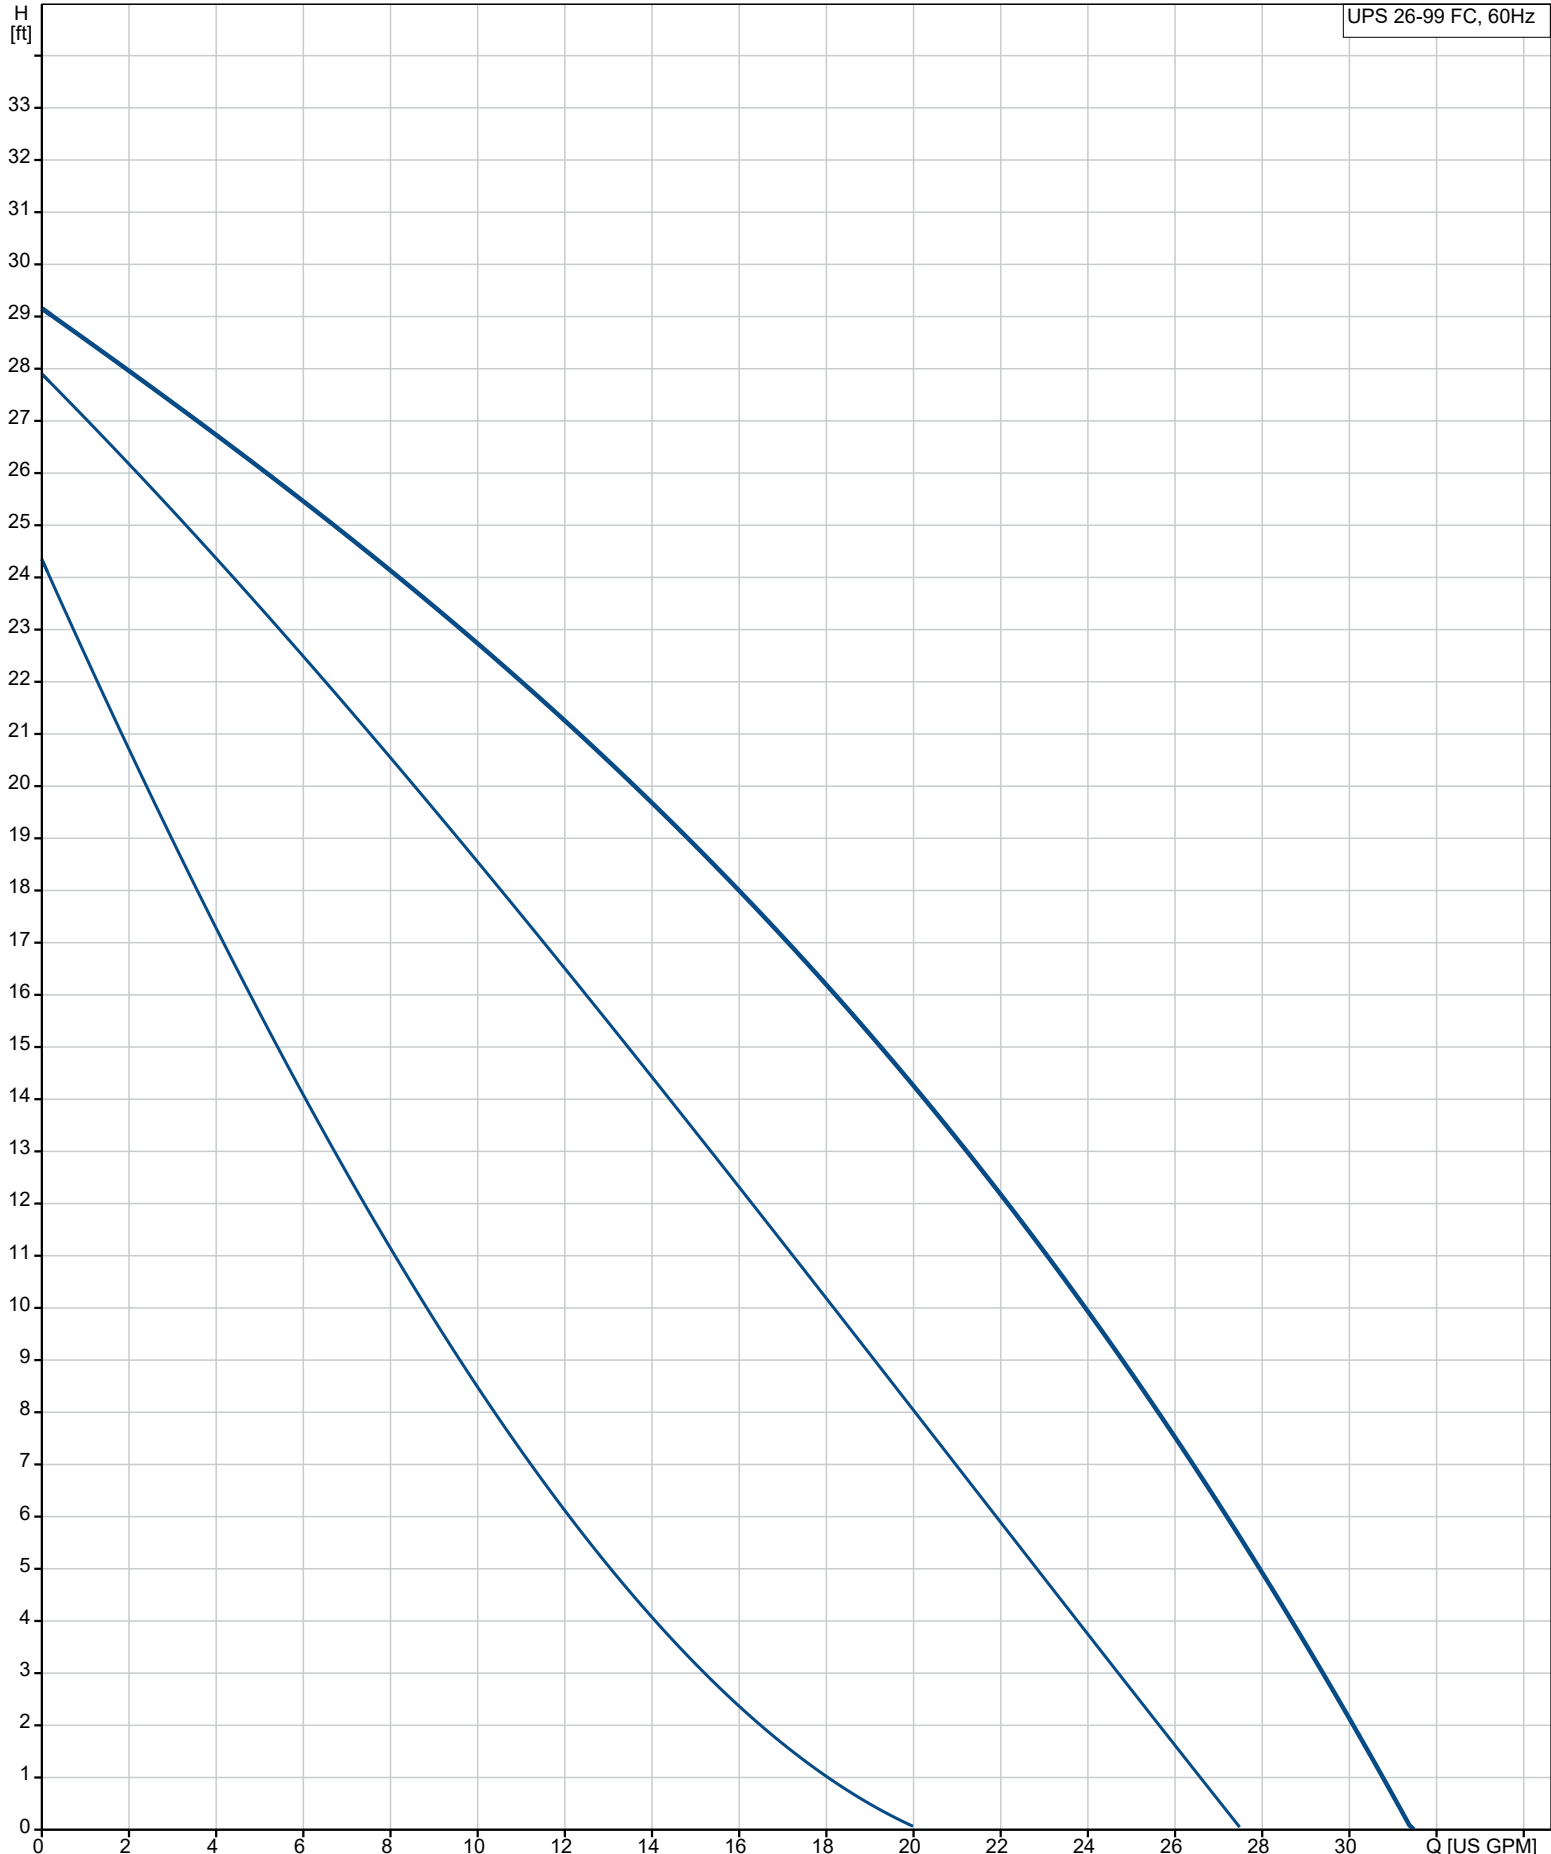

Pumped liquid = Water  
Liquid temperature during operation = 140 °F  
Density = 61.35 lb/ft³

## 52722512 UPS 26-99 FC 60 Hz

