DOWNSPOUT NOZZLE

>> 868 SERIES

SPECIFICATION

Sioux Chief 868 Series downspout nozzle shall be used where necessary in drainage systems to prevent water stains on exterior walls. Nozzle shall include a mounting flange for clean/secure appearance. Nozzle and mounting flange shall be made from cast nickel-bronze material.

MATERIALS


Nickel-bronze

DIMENSIONS

Size:		3''	4''	6''	8''
A :	Connection OD				
	No-Hub	33⁄8"	43⁄8"	65⁄8"	83⁄8"
	FIP	31⁄8"	41⁄8"	61⁄8"	81⁄8"
B:	Lip extension	2¾"	2¾"	3"	3"
C :	Overall Length	51⁄2"	51⁄2"	5¾"	61/4"
D:	Flange diameter	6"	7"	9"	11"

ITEM # SUBMITTED
JOB NAME
LOCATION
ENGINEER
CONTRACTOR
PO# TAG



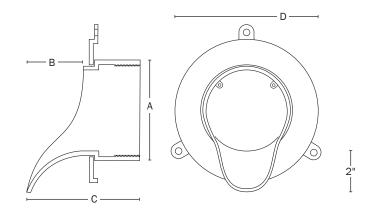

Create Item Number

868-<u>A B</u>

e.g. 868-N4H: Nickel-bronze downspout nozzle and mounting flange with 4" No-Hub connection

CONNECTION SIZE A

- **N3** = 3" connection
- **N4** = 4" connection
- **N6** = 6" connection
- **N8** = 8" connection

CONNECTION TYPE B

- \square **H** = No-Hub connection
- \Box **F** = FIP Thread connection

ACCESSORIES (ordered separately)

- □ 868-NS3 = Stainless steel protection screen for 3" nozzle
- □ 868-NS4 = Stainless steel protection screen for 4" nozzle
- **868-NS6** = Stainless steel protection screen for 6" nozzle
- B68-NS8 = Stainless steel protection screen for 8" nozzle

