

Qty. | Description

1 **UPS 26-150 F**



Note! Product picture may differ from actual product

Product No.: [95906630](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump has 3-step speed selector.

The pump is characterized by:

- * Ceramic shaft and radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can and bearing plate.
- * Corrosion-resistant impeller, Composite.
- * Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Pumped liquid: Water
Liquid temperature range: 35.6 .. 230 °F
Selected liquid temperature: 140 °F
Density: 61.35 lb/ft³

Technical:

Rated flow: 26.9 US GPM
Rated head: 25.37 ft
Approvals: CETL

Materials:

Pump housing: Cast iron
EN 1561 EN-GJL-200
ASTM A48-30B
Impeller: Composite
PES+30% GF

Installation:

Maximum ambient temperature: 104 °F
Amb. max at 80 dgr C liquid: 176 °F
Maximum operating pressure: 145.04 psi
Type of connection: OVAL
Pipe connection: 2-BOLT FLANGE
Pressure rating for connection: PN 10
Port-to-port length: 6 1/2 in

Electrical data:

Power input in speed 1: 0.3554 HP
Power input in speed 2: 335 W
Max. power input: 370 W
Mains frequency: 60 Hz
Rated voltage: 1 x 115 V
Current in speed 1: 2.5 A
Current in speed 2: 3.1 A
Current in speed 3: 3.5 A
Capacitor size - run: 40 µF/180 V
Number of poles: 2



Company name:

Created by:



Phone:

Date:

01/08/2023

Qty.	Description
1	<p>Insulation class (IEC 85): H Built-in motor protection: CONTACT</p> <p>Others: Terminal box position: 9H Net weight: 13.9 lb Gross weight: 15.2 lb Country of origin: US Custom tariff no.: 8413.70.2005</p>

Description	Value
General information:	
Product name:	UPS 26-150 F
Product No:	95906630
EAN number:	5700313291670
Technical:	
Speed no:	3
Rated flow:	26.9 US GPM
Max flow:	52 US GPM
Rated head:	25.37 ft
Maximum head:	45.28 ft
Approvals:	CETL
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-200
Pump housing:	ASTM A48-30B
Impeller:	Composite
Impeller:	PES+30% GF
Installation:	
Maximum ambient temperature:	104 °F
Amb. max at 80 dgr C liquid:	176 °F
Maximum operating pressure:	145.04 psi
Type of connection:	OVAL
Pipe connection:	2-BOLT FLANGE
Pressure rating for connection:	PN 10
Port-to-port length:	6 1/2 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	35.6 .. 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft ³
Electrical data:	
Power input in speed 1:	0.3554 HP
Power input in speed 2:	335 W
Max. power input:	370 W
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 1:	2.5 A
Current in speed 2:	3.1 A
Current in speed 3:	3.5 A
Capacitor size - run:	40 µF/180 V
Number of poles:	2
Insulation class (IEC 85):	H
Built-in motor protection:	CONTACT
Thermal protec:	internal
Others:	
Terminal box position:	9H
Net weight:	13.9 lb
Gross weight:	15.2 lb
Country of origin:	US
Custom tariff no.:	8413.70.2005

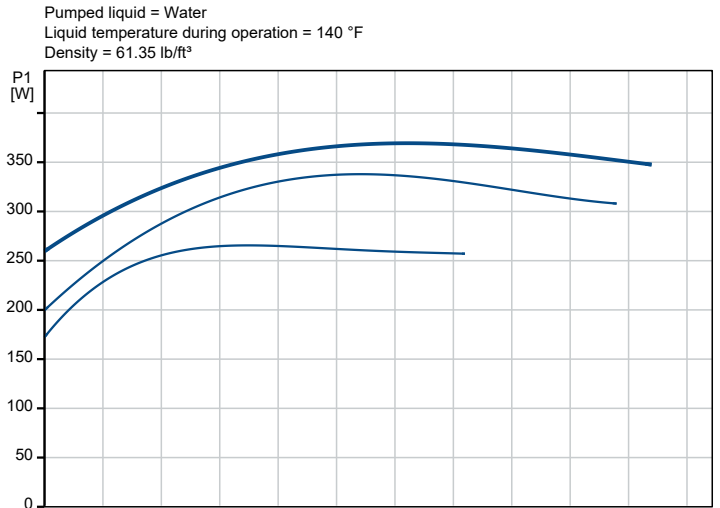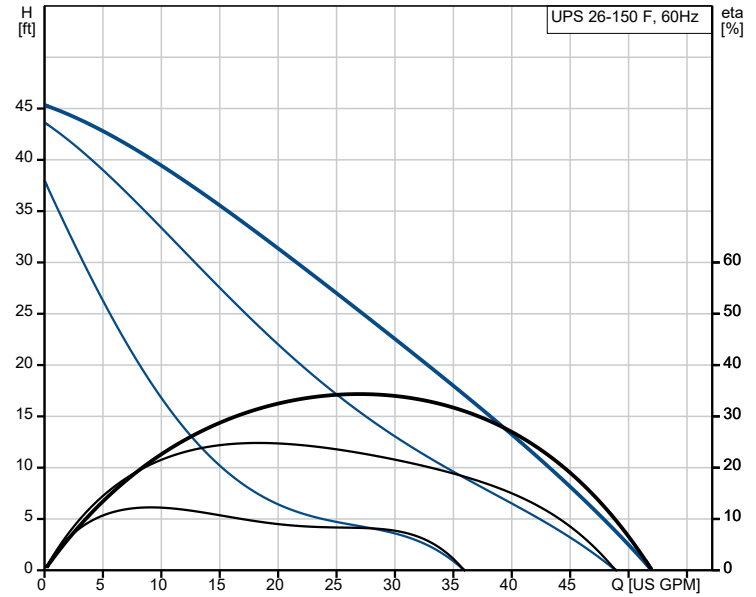

95906630 UPS 26-150 F 60 Hz

