

Qty. | Description

1 **UPS 40-160 F B**



Note! Product picture may differ from actual product

Product No.: [96402789](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible.

The pump is characterized by:

- * 3 speed motor.
- * Ceramic radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can, bearing plate and rotor cladding.
- * Aluminium alloy stator housing.
- * Bronze pump housing.
- * Stator with built-in thermal switch.

The motor is a 3-phase motor.

The pump is supplied with a standard module in the terminal box.

The standard module is to be connected to the mains supply via external contactor.

Controls:

Relay: without relay

Liquid:

Pumped liquid: Water
Liquid temperature range: 14 .. 248 °F
Selected liquid temperature: 140 °F
Density: 61.35 lb/ft³

Technical:

Approvals: CCSAUS, IAPMO

Materials:

Pump housing: Bronze
CuSn10
Impeller: Stainless steel
EN 1.4301
AISI 304


Installation:

Range of ambient temperature: 32 .. 104 °F
Maximum operating pressure: 145.04 psi
Type of connection: DIN
Pipe connection: GF 40/43
Pressure rating for connection: PN 10
Port-to-port length: 11 1/2 in


Electrical data:

Qty.	Description																																												
1	<table><tr><td>Power input in speed 1:</td><td>0.6705 HP</td></tr><tr><td>Power input in speed 2:</td><td>570 W</td></tr><tr><td>Max. power input:</td><td>800 W</td></tr><tr><td>Mains frequency:</td><td>60 Hz</td></tr><tr><td>Rated voltage:</td><td>3 x 208-230 V</td></tr><tr><td>Current in speed 1:</td><td>1.55 A</td></tr><tr><td>Current in speed 2:</td><td>1.75 A</td></tr><tr><td>Current in speed 3:</td><td>2.5 A</td></tr><tr><td>Cos phi in speed 1:</td><td>0.81</td></tr><tr><td>Cos phi in speed 2:</td><td>0.82</td></tr><tr><td>Cos phi:</td><td>0.8</td></tr><tr><td>Enclosure class (IEC 34-5):</td><td>X4D</td></tr><tr><td>Insulation class (IEC 85):</td><td>H</td></tr><tr><td>Built-in motor protection:</td><td>CONTACT</td></tr><tr><td>Winding resistance:</td><td>22.8 - 30.0 ohm</td></tr><tr><td colspan="2">Others:</td></tr><tr><td>Terminal box position:</td><td>1.30H</td></tr><tr><td>Net weight:</td><td>54.3 lb</td></tr><tr><td>Gross weight:</td><td>58.6 lb</td></tr><tr><td>Shipping volume:</td><td>3.46 ft³</td></tr><tr><td>Country of origin:</td><td>RS</td></tr><tr><td>Custom tariff no.:</td><td>8413.70.2005</td></tr></table>	Power input in speed 1:	0.6705 HP	Power input in speed 2:	570 W	Max. power input:	800 W	Mains frequency:	60 Hz	Rated voltage:	3 x 208-230 V	Current in speed 1:	1.55 A	Current in speed 2:	1.75 A	Current in speed 3:	2.5 A	Cos phi in speed 1:	0.81	Cos phi in speed 2:	0.82	Cos phi:	0.8	Enclosure class (IEC 34-5):	X4D	Insulation class (IEC 85):	H	Built-in motor protection:	CONTACT	Winding resistance:	22.8 - 30.0 ohm	Others:		Terminal box position:	1.30H	Net weight:	54.3 lb	Gross weight:	58.6 lb	Shipping volume:	3.46 ft ³	Country of origin:	RS	Custom tariff no.:	8413.70.2005
Power input in speed 1:	0.6705 HP																																												
Power input in speed 2:	570 W																																												
Max. power input:	800 W																																												
Mains frequency:	60 Hz																																												
Rated voltage:	3 x 208-230 V																																												
Current in speed 1:	1.55 A																																												
Current in speed 2:	1.75 A																																												
Current in speed 3:	2.5 A																																												
Cos phi in speed 1:	0.81																																												
Cos phi in speed 2:	0.82																																												
Cos phi:	0.8																																												
Enclosure class (IEC 34-5):	X4D																																												
Insulation class (IEC 85):	H																																												
Built-in motor protection:	CONTACT																																												
Winding resistance:	22.8 - 30.0 ohm																																												
Others:																																													
Terminal box position:	1.30H																																												
Net weight:	54.3 lb																																												
Gross weight:	58.6 lb																																												
Shipping volume:	3.46 ft ³																																												
Country of origin:	RS																																												
Custom tariff no.:	8413.70.2005																																												

Description	Value
General information:	
Product name:	UPS 40-160 F B
Product No:	96402789
EAN number:	5700390681470
Technical:	
Speed no:	3
Maximum head:	52.5 ft
Approvals:	CCSAUS,IAPMO
Model:	C
Materials:	
Pump housing:	Bronze
Pump housing:	CuSn10
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	32 .. 104 °F
Maximum operating pressure:	145.04 psi
Type of connection:	DIN
Pipe connection:	GF 40/43
Pressure rating for connection:	PN 10
Port-to-port length:	11 1/2 in
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	14 .. 248 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft ³
Electrical data:	
Power input in speed 1:	0.6705 HP
Power input in speed 2:	570 W
Max. power input:	800 W
Mains frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Current in speed 1:	1.55 A
Current in speed 2:	1.75 A
Current in speed 3:	2.5 A
Cos phi in speed 1:	0.81
Cos phi in speed 2:	0.82
Cos phi:	0.8
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Built-in motor protection:	CONTACT
Thermal protec:	external
Winding resistance:	22.8 - 30.0 ohm
Controls:	
Relay:	without relay
Others:	
Terminal box position:	1.30H
Net weight:	54.3 lb
Gross weight:	58.6 lb
Shipping volume:	3.46 ft ³
Country of origin:	RS
Custom tariff no.:	8413.70.2005

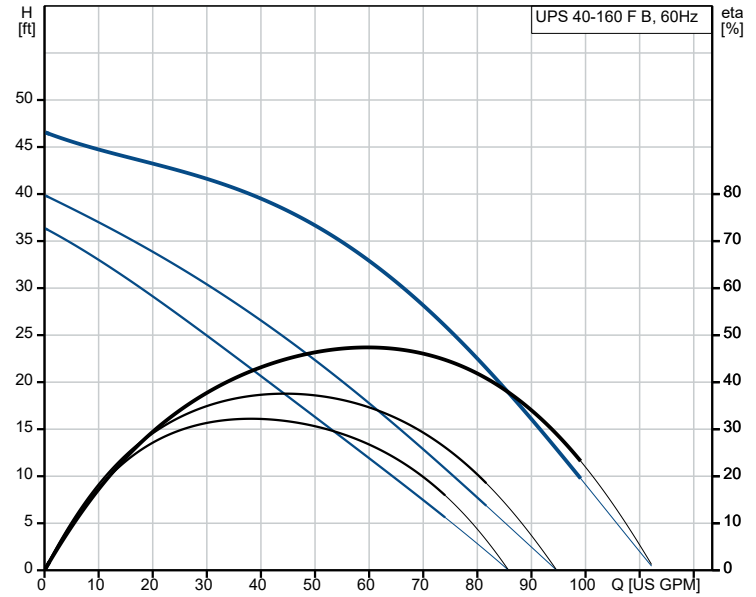

Pumped liquid = Water
 Liquid temperature during operation = 140 °F
 Density = 61.35 lb/ft³

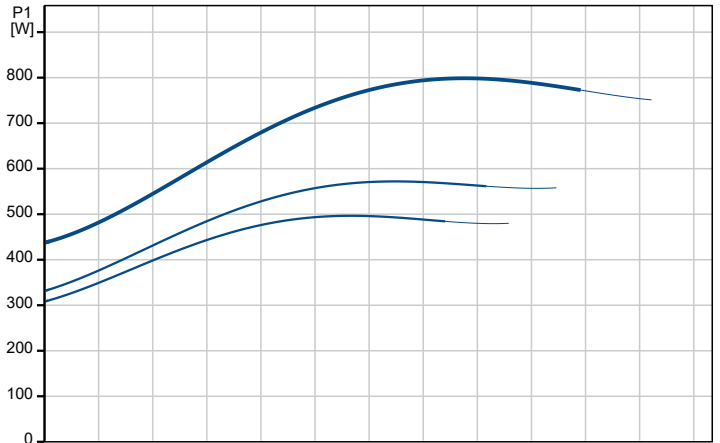

96402789 UPS 40-160 F B 60 Hz

