


Qty.	Description
1	<p>UPS 40-240 F B</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 96402804</p> <p>The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.</p> <p>In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible. The pump is characterized by:</p> <ul style="list-style-type: none"> * 3 speed motor. * Ceramic radial bearings. * Carbon axial bearing. * Stainless steel rotor can, bearing plate and rotor cladding. * Aluminium alloy stator housing. * Bronze pump housing. * Stator with built-in thermal switch. <p>The motor is a 1-phase motor.</p> <p>The pump is supplied with a standard module in the terminal box. The standard module is to be connected to the mains supply via external contactor.</p> <p>Controls:</p> <p>Relay: with relay</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: 14 .. 248 °F</p> <p>Selected liquid temperature: 140 °F</p> <p>Density: 61.35 lb/ft³</p> <p>Technical:</p> <p>Approvals: CCSAUS,IAPMO</p> <p>Materials:</p> <p>Pump housing: Bronze CuSn10</p> <p>Impeller: Stainless steel EN 1.4301 AISI 304</p> <p>Installation:</p> <p>Range of ambient temperature: 32 .. 104 °F</p> <p>Maximum operating pressure: 145.04 psi</p> <p>Type of connection: DIN</p> <p>Pipe connection: GF 40/43</p> <p>Pressure rating for connection: PN 10</p> <p>Port-to-port length: 13 1/2 in</p> <p>Electrical data:</p>


Qty.	Description
1	<div> <div>Power input in speed 1:</div> <div>1.4751 HP</div> </div> <div> <div>Power input in speed 2:</div> <div>1200 W</div> </div> <div> <div>Max. power input:</div> <div>1350 W</div> </div> <div> <div>Mains frequency:</div> <div>60 Hz</div> </div> <div> <div>Rated voltage:</div> <div>1 x 230 V</div> </div> <div> <div>Current in speed 1:</div> <div>5.15 A</div> </div> <div> <div>Current in speed 2:</div> <div>5.55 A</div> </div> <div> <div>Current in speed 3:</div> <div>6.2 A</div> </div> <div> <div>Cos phi in speed 1:</div> <div>0.93</div> </div> <div> <div>Cos phi in speed 2:</div> <div>0.94</div> </div> <div> <div>Cos phi:</div> <div>0.95</div> </div> <div> <div>Capacitor size - run:</div> <div>30 μF/400 V</div> </div> <div> <div>Enclosure class (IEC 34-5):</div> <div>X4D</div> </div> <div> <div>Insulation class (IEC 85):</div> <div>H</div> </div> <div> <div>Built-in motor protection:</div> <div>CONTACT</div> </div> <div> <div>Others:</div> <div></div> </div> <div> <div>Terminal box position:</div> <div>1.30H</div> </div> <div> <div>Net weight:</div> <div>58.4 lb</div> </div> <div> <div>Gross weight:</div> <div>70.6 lb</div> </div> <div> <div>Shipping volume:</div> <div>3.46 ft³</div> </div> <div> <div>Country of origin:</div> <div>RS</div> </div> <div> <div>Custom tariff no.:</div> <div>8413.70.2005</div> </div>




Company name:
Created by:
Phone:

Date: 03/03/2023

Description	Value
General information:	
Product name:	UPS 40-240 F B
Product No:	96402804
EAN number:	5700390681999
Technical:	
Speed no:	3
Maximum head:	78.74 ft
Approvals:	CCSAUS,IAPMO
Model:	C
Materials:	
Pump housing:	Bronze
Pump housing:	CuSn10
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	32 .. 104 °F
Maximum operating pressure:	145.04 psi
Type of connection:	DIN
Pipe connection:	GF 40/43
Pressure rating for connection:	PN 10
Port-to-port length:	13 1/2 in
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	14 .. 248 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Power input in speed 1:	1.4751 HP
Power input in speed 2:	1200 W
Max. power input:	1350 W
Mains frequency:	60 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	5.15 A
Current in speed 2:	5.55 A
Current in speed 3:	6.2 A
Cos phi in speed 1:	0.93
Cos phi in speed 2:	0.94
Cos phi:	0.95
Capacitor size - run:	30 µF/400 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Built-in motor protection:	CONTACT
Thermal protec:	internal
R a:	6.8 - 8.95 ohm
R s1:	2.02 - 2.65 ohm
R s2:	3.7 - 4.85 ohm
Controls:	
Relay:	with relay
Others:	
Terminal box position:	1.30H
Net weight:	58.4 lb
Gross weight:	70.6 lb
Shipping volume:	3.46 ft³
Country of origin:	RS
Custom tariff no.:	8413.70.2005

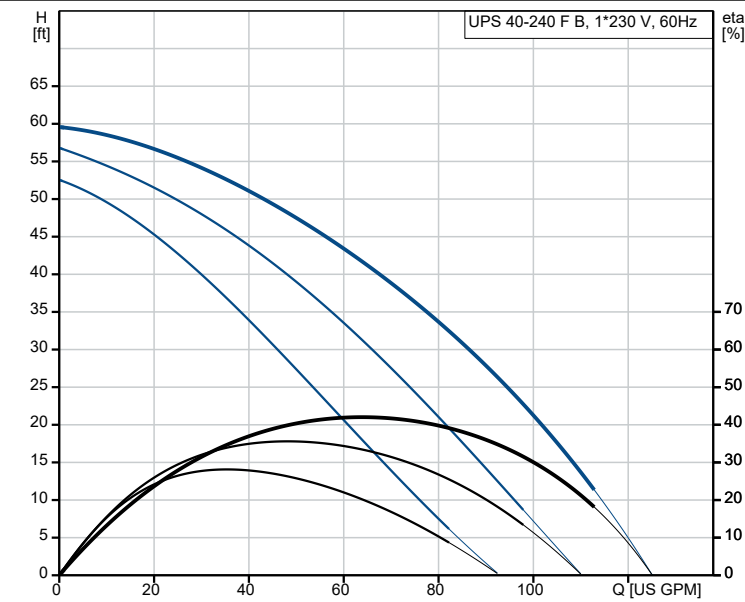

Pumped liquid = Water
Liquid temperature during operation = 140 °F
Density = 61.35 lb/ft³

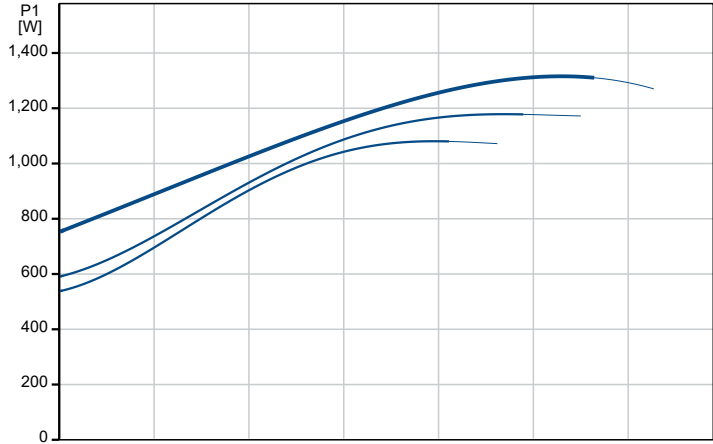

96402804 UPS 40-240 F B 60 Hz

