

Location: _____




A2-BG

A2-BG STAINLESS STEEL BALLAST GUARD

Specification: MIFAB® A2-BG, 12" diameter, 6" high stainless steel ballast guard with 1/2" diameter holes.

Function: For roofs that use the insulated membrane assembly method of waterproofing (I.R.M.A.). Typical when built-up felt and asphalt waterproofing is installed on top of the roof membrane for protection against the elements. The 6" high perforated stainless steel ballast guard is furnished to retain the crushed gravel used in flat roof construction. The 1/2" diameter holes allow for drainage without clogging.

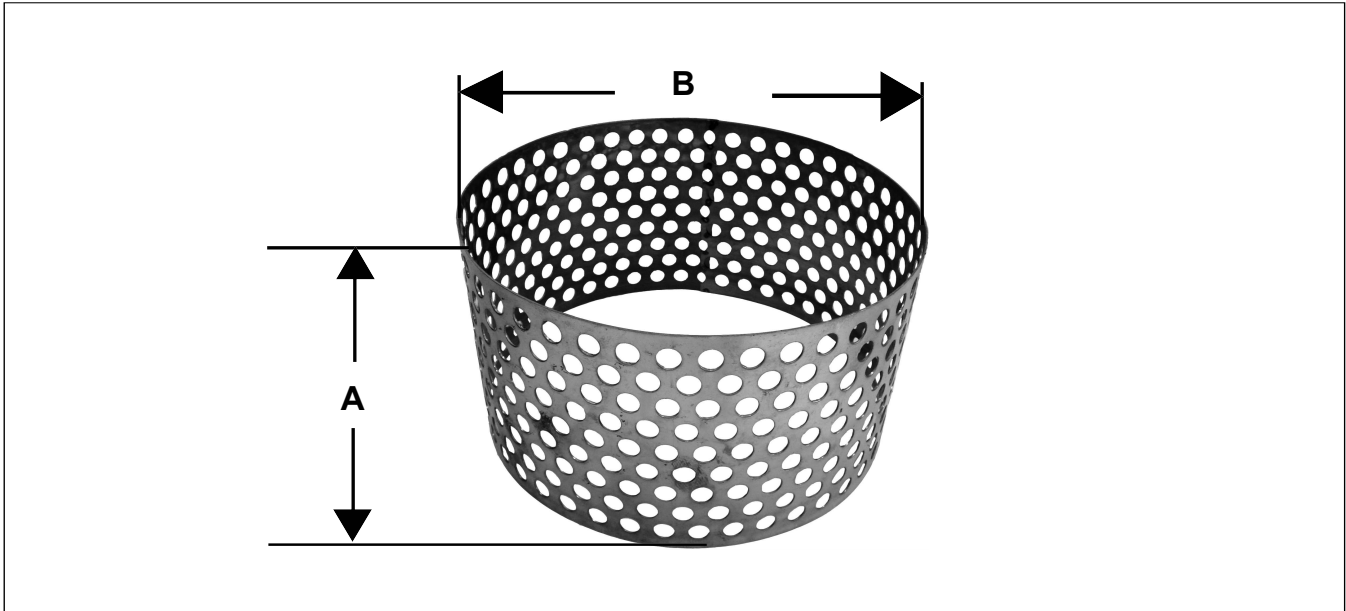

PART NO.	"A"	"B"	WEIGHT (LBS.)
A2-BG	6"	12"	3.00
A2-BG8	8"	12"	4.00

SUFFIX	OPTIONAL VARIATIONS
-83	Stainless steel mesh screen

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

2023-10-31RH