


MEMBRANE CLAMP FOR OVERFLOW DRAINS

Specification:13" diameter lacquered cast iron membrane clamp with either 4" or 6" NPSM tapping in center to receive an overflow pipe. Tabs included to receive roof dome, weepholes on underside to drain water and integral gravel stop.

Function: Used with MIFAB's A2 and A3 bodies to receive the dome strainer for roof drains, seal the waterproofing membrane and to receive an overflow standpipe in the center in overflow roof drain applications. Also used with MIFAB's large floor and area drains to seal the waterproofing membrane and to receive an overflow / planter type perforated pipe in the center.

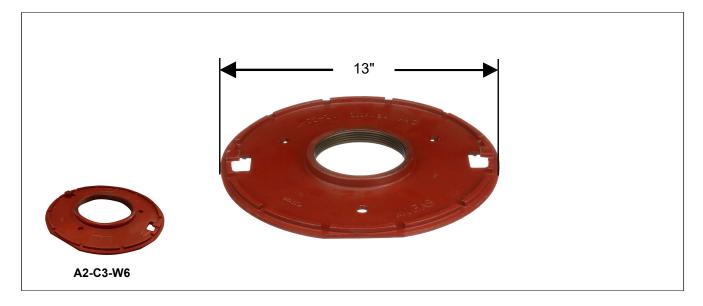

PART NO.	DESCRIPTION	WT. (LBS.)
A2-C3-W	Membrane Clamp for 4" Dia. standpipe	9.50
A2-C3-W6	Membrane Clamp for 6" Dia. standpipe	8.00
A2-C3-WD	Membrane clamp for 4" Dia. standpipe with weepholes on underside	9.50

SUFFIX	OPTIONAL VARIATIONS	
-11	Acid resistant powder epoxy coating	
-13	Galvanized coating	

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:
MIEAR reserves the right to make changes in material and design without formal notice and o	bligation LISA: 1.800-465-2736 www.mifab.com CAN: 1.800-387-3880