

Features


- Little to no tube preparation
- Available in a broad range of sizes

Specifications & Approvals

Temperature: -65° - 250°F max pressure

Vibration: Fair vibration resistance*

No Lead Product CSA listed to NSF 372 (Class 6853-01)

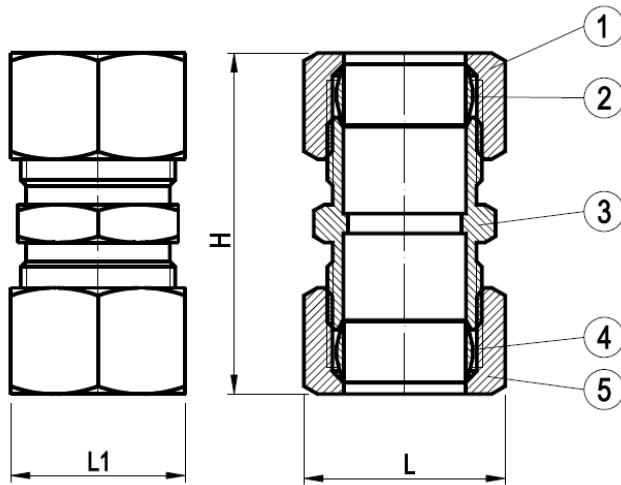

Dimensions

Part#	Size	H	L	L1	Weight Kg
C62-14-NL	1/4"	34.8	14.7	12.7	0.023
C62-38-NL	3/8"	38	18.5	16	0.035
C62-12-NL	1/2"	45.5	23.1	20	0.058
C62-58-NL	5/8"	45	26.6	23	0.068
C62-78-NL	7/8"	47.1	35.2	31.7	0.136

Materials

Part Name	Material
1. Packing Nut	Brass
2. Sleeve	Brass
3. Body	Brass
4. Sleeve	Brass
5. Packing Nut	Brass