

CSS SERIES 304 STAINLESS STEEL INSERT FITTINGS - COUPLINGS

SPECIFICATION:


- Material Conforms to ASTM A351

CERTIFICATION:

- NSF/ANSI Standard 372 Certified



MATERIAL LIST	
Part Name	Percent of Composition
304 Stainless Steel (ASTM A351)	
Iron (FE)	64.0 - 72.0
Carbon (C)	0.08 max
Silicone (Si)	2.00 max
Manganese (Mn)	1.50 max
Phosphorus (P)	0.04 max
Sulfur (S)	0.04 max
Chromium (Cr)	18.0 - 21.0
Nickel (Ni)	8.0 - 11.0
Molybdenum (Mo)	0.05 max

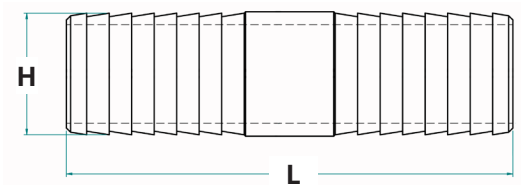

DIMENSIONS								
Part No.	Size	Number of Barbs	L		H		Weight	
			inches	mm	inches	mm	Lbs	Grams
CSS-050	1/2"	6	3.50	88.90	0.60	15.24	0.12	54
CSS-075	3/4"	6	3.50	88.90	0.75	19.05	0.20	91
CSS-075-050	3/4" x 1/2"	6	3.63	92.20	0.75	19.05	0.18	79
CSS-100	1"	7	3.88	98.55	1.05	26.67	0.32	145
CSS-100-075	1" x 3/4"	7 x 6	4.00	101.60	1.00	25.40	0.25	113
CSS-125	1-1/4"	7	3.88	98.55	1.30	33.02	0.54	243
CSS-125-100	1-1/4" x 1"	7	4.25	107.95	1.35	34.29	0.44	197
CSS-150	1-1/2"	9	4.75	120.65	1.60	40.64	0.74	333
CSS-150-125	1-1/2" x 1-1/4"	9 x 7	4.75	120.65	1.55	39.37	0.60	272
CSS-200	2"	9	4.75	120.65	2.10	53.34	1.08	490
CSS-200-150	2" x 1-1/2"	9	4.88	123.95	2.05	52.07	1.02	460



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com