


## STANDARD NO-HUB COUPLING DATA SHEET

### Standard No-Hub Pipe Couplings

Can be used to assemble No-Hub Pipe and Fittings manufactured per ASTM A 888. The couplings consist of a gasket made of an elastomeric compound enclosed in a diamond pattern stainless steel shield. Depending on the size of the shield, two or four clamps are provided to give the required sealing force to the shield to seal the gasket on the pipes and fittings.

#### Marking, Certification, Standards:

- Product standard ASTM C 1277 and CISPI 310
- High quality elastomeric compound gasket conforming to standard ASTM C 564
- IAPMO and CSA certification

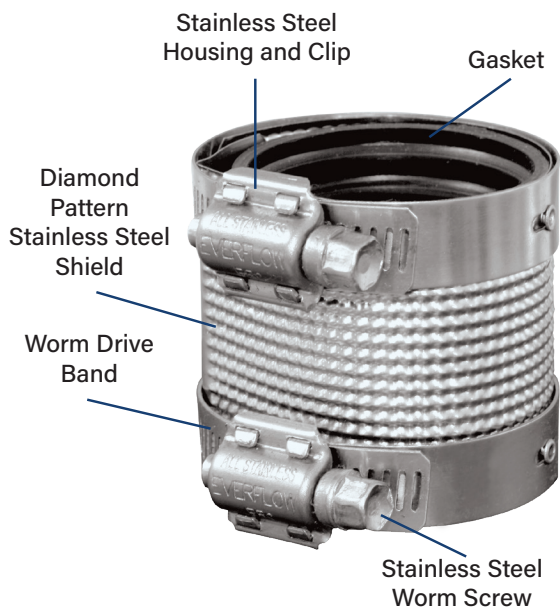

Size	Shield Width	Installation Torque	No. of Clamps Per
1-1/2"	2-1/8"	60	2
2"	2-1/8"	60	2
3"	2-1/8"	60	2
4"	2-1/8"	60	2
5"	3"	60	4
6"	3"	60	4
8"	4"	60	4
10"	4"	60	4
12"	5.43"	60	6
15"	5.43"	60	6
1-1/2" x 2"	2-1/8"	60	2
2" x 3"	2-1/8"	60	2
4" x 2"	2-1/8"	60	2
4" x 3"	2-1/8"	60	2

Material	
<b>Band</b>	SS304 Stainless Steel
<b>Screw</b>	5/16" Hex head made of SS304 Stainless Steel
<b>Housing</b>	SS304 Stainless Steel
<b>Shield</b>	0.007" Thick diamond design SS301
<b>Gasket</b>	Elastomeric Compound Conforming to ASTM C 564

#### Installation Instructions:

1. Place gasket on the end of one pipe and clamp the assembly over the other pipe.
2. Fit second hubless pipe end into gasket, firmly putting both ends against the rib, or shoulder, in the center of the gasket. Make certain the pipe and/or fitting to be joined are in proper alignment, then slide the loose coupling over the gasket so that the gasket is completely covered.
3. Using a calibrated torque wrench, tighten the stainless steel screws alternately to the proper torque pounds (60 inch lbs. torque).