


F980V / F980VPEX


2-Way Pressure Balance Mixer Valve

artos®

OPERATING SPECIFICATIONS

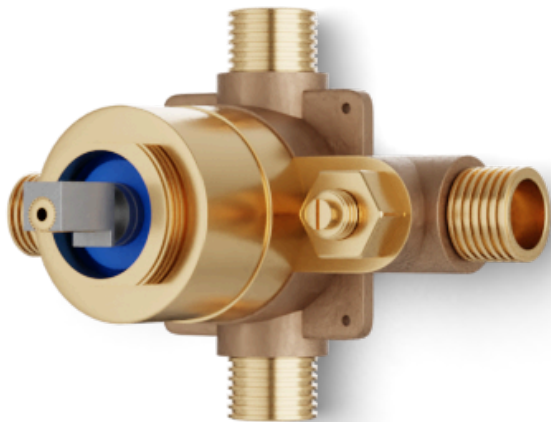

F980V

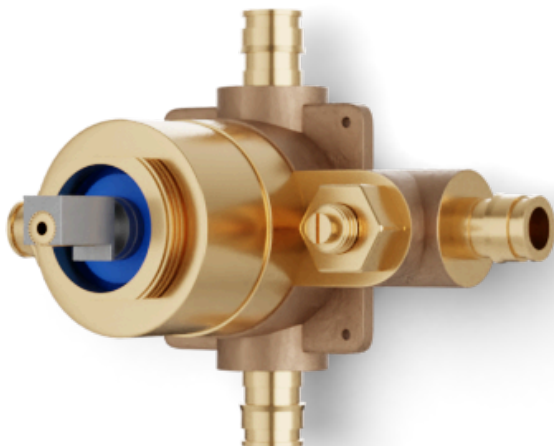

F980VPEX

MIXED WATER TEMPERATURE

Maximum: 120°

HOT WATER SUPPLY TEMPERATURE

Maximum: 180°

Minimum: 50°

Advisable: 150°-160°

Minimum difference between hot
mixed temperature 50°

OPERATING PRESSURE

Minimum: 20psi

Maximum: 125psi

Reccomended: 30psi-95psi

Operating pressures (on hot and cold
lines) should be kept as balanced as
possible, in order to assure the
maximum efficiency.

STANDARDS

ASSE 1016-2011

ASME_A112.1016-2011

CSA B125:16-11



F980V / F980VPEX


2-Way Pressure Balance Mixer Valve

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F980V

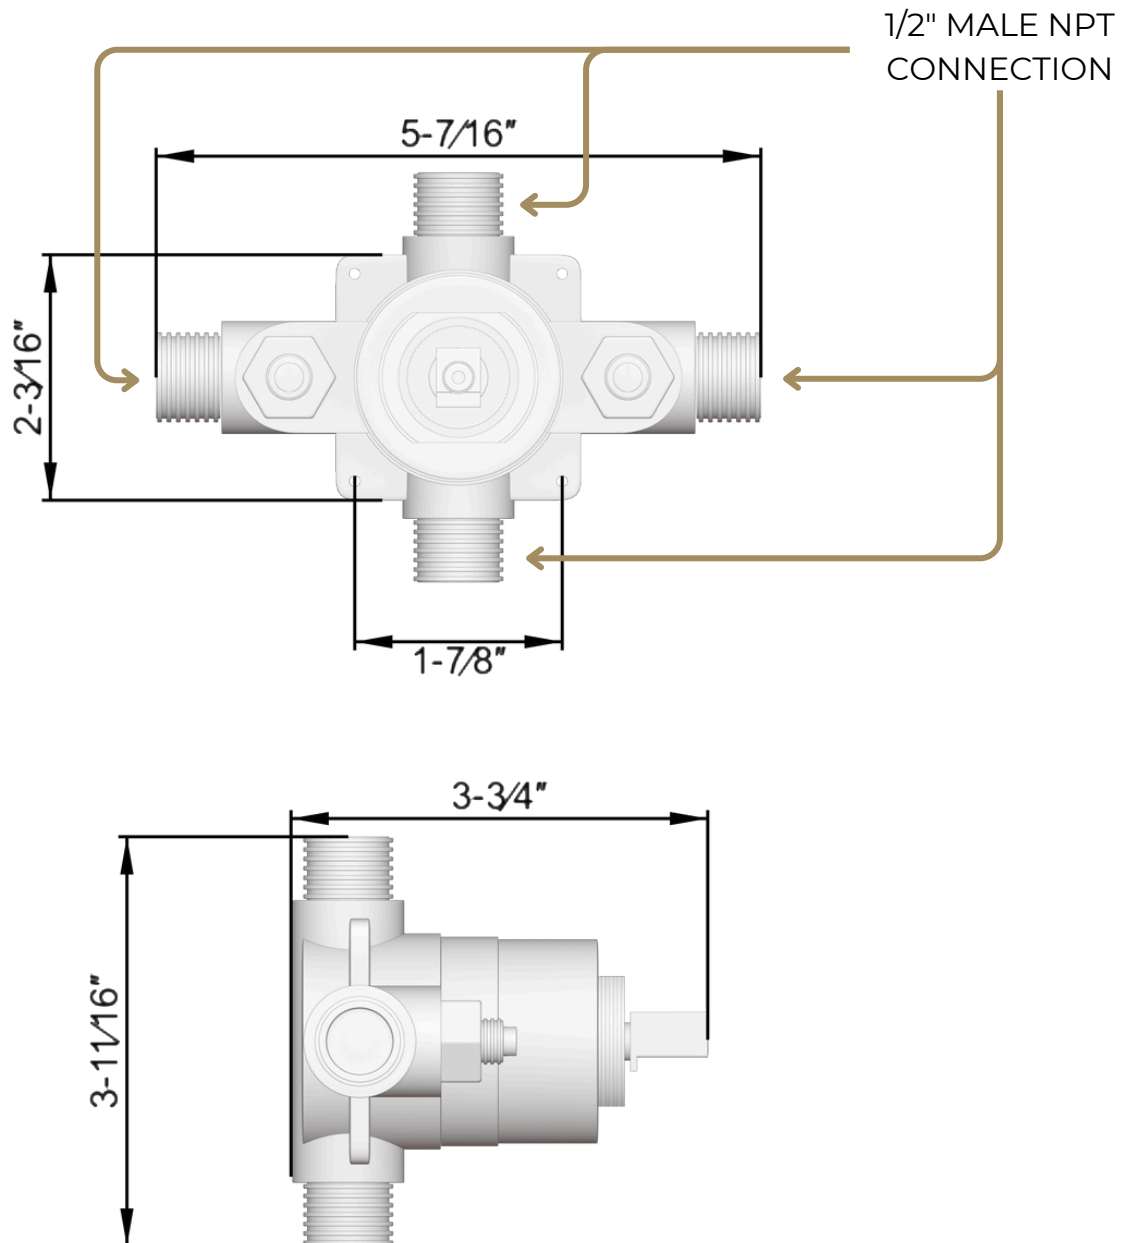

F980V / F980VPEX

2-Way Pressure Balance Mixer Valve

artos®

PRODUCT DIMENSIONS

PRODUCT SKU

F980VPEX

