

OPTIONS

Flush Volume

- 1.0 gpf (3.8 Lpf) (1.0)
- 0.5 gpf (1.9 Lpf) (0.5)
- 1.5 gpf (5.7 Lpf) (1.5)

Finish

- Polished Chrome (CP)
- Brushed Stainless (SF)
- Brushed Nickel (BN)
- Polished Brass (PB)
- Graphite (GR)

Water Efficiency

- Low Consumption
- High Efficiency
- Water Saver

Override

- Less (L/OR)

Control Stop

- Less (L/STOP)
- 1" Straight (E)
- 1"

Vacuum Breaker

- Less (XYV)

Bumper

- Angle Stop (YO)

Special Features

- Carbon Offset (CO)
- Less Logo (LL)

Compliances & Certifications

- ADA Compliant
- BAA Compliant
- cUPC Certified
- UL Certified
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change

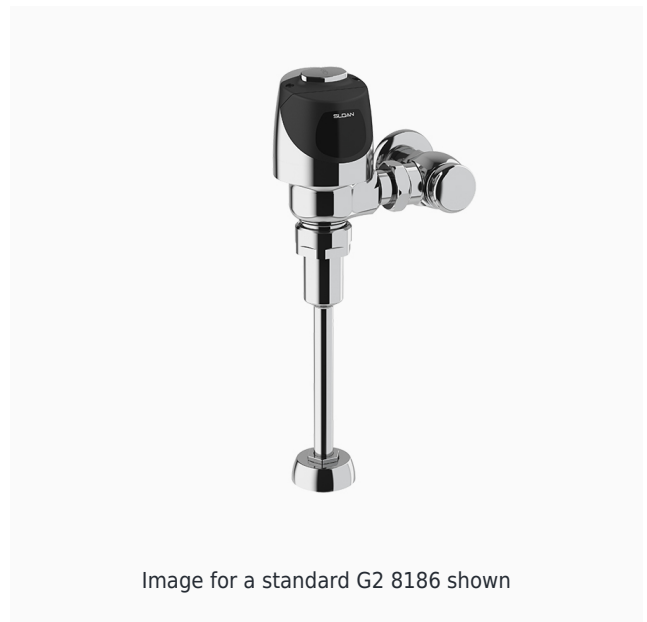


Image for a standard G2 8186 shown

DESCRIPTION

G2 Exposed Sensor Urinal Flushometer

FEATURES

- ADA-compliant flushometer automatically operates by means of a infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Adjustable tailpiece to accommodate different height requirements
- High copper, low zinc brass castings for dezincification resistance
- Available in 0.5 gpf/1.9 Lpf, low consumption (1.0 gpf/3.8 Lpf), water saver (1.5 gpf/5.7 Lpf), and conventional (3.5 gpf/13.2 Lpf) models
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions](#)
- [G2 Repair and Maintenance Guide](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Optima Plus Flushometers Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

without notice.

- [Additional Downloads](#)

VIDEOS

-  [PVD Special Finishes](#)