

Location: \_\_\_\_\_




**R**

**REINFORCED ROUND  
CLEANOUT TOP ASSEMBLY**


**Specification:** MIFAB Cleanout top assembly with 4" machined N.P.S.M. threads. Available in 5" diameter and in either medium duty nickel bronze (2,000 - 4,999 lbs.), or in heavy duty Type 304 stainless steel (5,000 - 7,499 lbs.) and / or "Special Duty" (over 10,000 lbs.) ductile iron. Furnished standard with vandal resistant allen key screws.

**Function:** Used as a finished floor / cleanout top assembly to provide access to the underground piping system to clean out any line blockages. The top assembly has a 4" N.P.S.M. thread to work with any of MIFAB's cleanout bodies. The XR-4 ductile iron cleanout top assembly is ideal for warehouse / factory applications. The 1/2" thick ductile iron cover withstands forklift traffic.

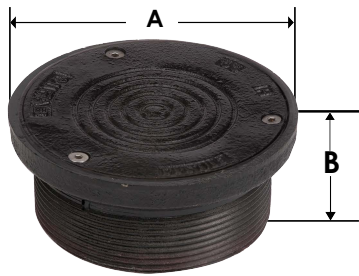

4" N.P.S.M.

**Ductile Iron**

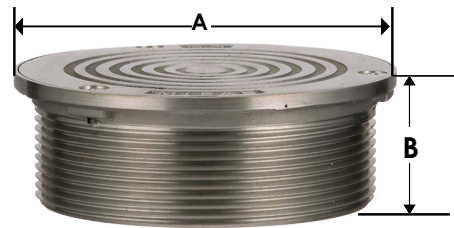

4" N.P.S.M.

**Stainless Steel (Type 304)**

TOP ASSEMBLY	"A"	"B" HEIGHT	WT. LBS.	TOP ASSEMBLY ADJUSTMENT	
				MIN.	MAX
5"	5.00"	1.77"	1.75	1/2"	1 1/2"

SUFFIX	OPTIONAL VARIATIONS
-1	Nickel Bronze
-3	Stainless Steel (Type 304)
-4	Ductile Iron
-6	Security Screws (TR25 Torx and pin - H-1039A)
-49	Polished Chrome

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880