

OPTIONS

Flush Volume

- 0.5 gpf (1.9 Lpf) (0.5)
- 1.0 gpf (3.8 Lpf) (1.0)
- 0.125 gpf (0.5 Lpf) (0.125)
- 1.5 gpf (5.7 Lpf) (1.5)
- 0.25 gpf (0.9 Lpf) (0.25)

Water Efficiency

- High Efficiency
- Low Consumption
- Water Saver

Bypass

- Dual-Filtered Fixed Bypass Diaphragm

Control Stop

- Less (L/STOP)

Special Features

- Lithium Batteries
- Less Logo (LL)


Compliances & Certifications

- ADA Compliant
- BAA Compliant
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified
- BREEAM Materials Credit

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

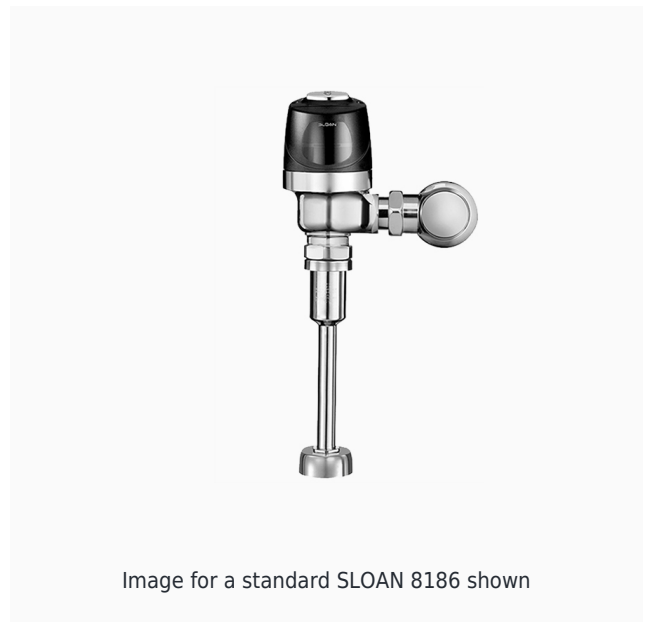

DESCRIPTION

Sloan® Exposed Sensor Urinal Flushometer

FEATURES

- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.
- Courtesy Flush® Override Button

DOWNLOADS

- [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Optima Plus Flushometers Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)