


NSF APPROVED NO-HUB COUPLINGS

CERTIFIED TO CISPI 310 & CSA B602 STANDARDS

Specifications:

- 304 Series stainless steel bands
- NSF Certified to CISPI 310 CSA B602
- Certified by Intertek to CAN/ULC S102.2-07
- Tested and Certified to ASTM C1277
- Elastomeric Gasket conforms to ASTM C-564
- Maintains 4.3 PSI Water Pressure
- Tighten with 5/16" Hex Driver to 60 in-lbs. torque

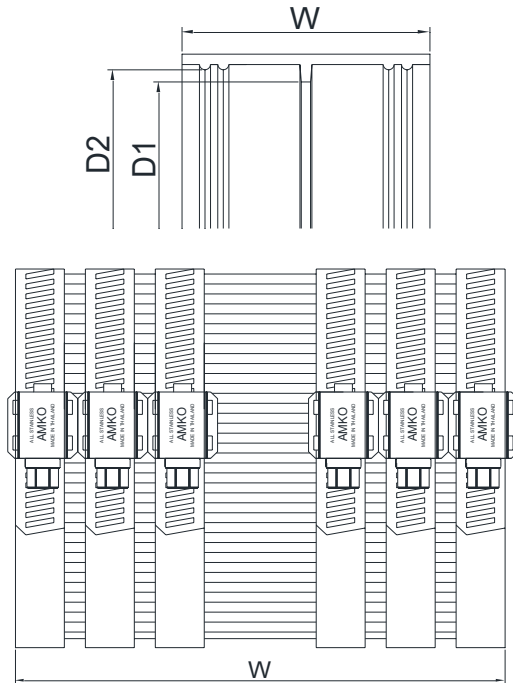

Dimensions

Part #	Size	W	D1	D2	Install Torque
14112N	1-1/2"	2.13	1.53	1.94	60
14200N	2"	2.13	1.97	2.34	60
14300N	3"	2.13	2.97	3.34	60
14400N	4"	2.13	4.00	4.41	60
14500N	5"	3.00	4.97	5.34	60
14600N	6"	3.00	5.97	6.34	60
14800N	8"	4.00	7.97	8.34	60
1410N	10"	4.00	9.98	10.35	60
1412N	12"	5.50	12.00	12.43	80
1415N	15"	5.50	15.20	15.65	80

Material Specifications

Part Name	Material
Rubber Gasket	Polychloroprene
Band	Stainless Steel 300
Eyelets	Stainless Steel 300
Housing Clamp	Stainless Steel 300
Shield	Stainless Steel 300
Screw	Stainless Steel 305 and or 304L