


**INCLUDES CAP & CHAIN • FULL PORT • 600 WOG • SWEAT X HOSE CONNECTION**

## Features

- Cap and seal for easy drain and hose connection
- Sweat by hose connection, with cap
- Dezincification resistant lead free brass
- Stainless steel ball
- Blow-out proof brass stem
- Packing nut, o-ring & PTFE seal on the stem
- Lever handle with vinyl grip

## Specifications & Approvals

Sweat ends conforms to ASME B16.22  
 Max Pressure Rating: 600 psi WOG / 150 psi WSP  
 Temperature Range: -20°F to 300°F  
 CSA approved per NSF/ANSI-61, NSF/ANSI-372, IGC-157

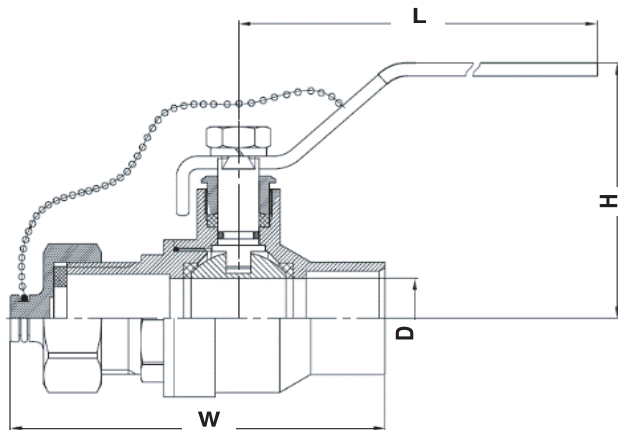

## Dimensions

**RAVEN**  
SPECIALTY PRODUCTS

Part#	Size	D	L	H	W	Cv
CHBV-012-NL	1/2"	0.591	3.46	1.81	3.07	18.55
CHBV-034-NL	3/4"	0.748	4.29	2.09	3.54	29.76

## Material Specifications

Part Name	Material
<b>Body</b>	Lead Free Brass C46500
<b>Seat</b>	PTFE
<b>Ball</b>	SS304
<b>Stem O-Ring</b>	NBR
<b>Packing Nut</b>	Brass C37700
<b>Stem</b>	Brass C37700
<b>Lock Nut</b>	Ferrum / Zinc Plated
<b>Lock Washer</b>	Ferrum / Zinc Plated
<b>Packing</b>	PTFE
<b>Handle</b>	Ferrum / Chrome Plated
<b>Cap</b>	Lead Free Brass C46500
<b>Copper Nut</b>	Brass C37700
<b>Gasket</b>	EPDM
<b>Bead-Chain</b>	Plated Steel