

ApolloPress coupling (P x P)



group: 800 **category:** fittings **product line:** Apollo ApolloPress

The ApolloPress® 800 Small Diameter Press Coupling features a lead free dezincification resistant copper body and an EPDM o-ring. ApolloPress® products are manufactured utilizing proven ASTM materials and standards.

- Lead Free Construction
- Leak Before Press® Technology

applications

potable water, heating, cooling,
steam, compressed air, sprinkler,
vacuum

segments

fire protection , utility , industry

approvals

CRN , FM , IAPMO/ANSI/CAN Z1117
, ICC LC1002 , NSF/ANSI 372 ,
NSF/ANSI 61 , UL , ULc

assortment

item code	size	dimensions	weight	packaging	gtin + upc
10075500	1/2"	1.72x0.95x0.95 "	0.08 lb	-	00683264755000
10075502	3/4"	1.89x1.24x1.24 "	0.13 lb	-	00683264755024
10075504	1"	2.06x1.49x1.49 "	0.17 lb	-	00683264755048
10077698	1 1/4"	2.34x1.75x1.75 "	0.25 lb	-	00683264776982
10077699	1 1/2"	3.10x2.09x2.09 "	0.5 lb	-	00683264776999
10077000	2"	3.42x2.56x2.56 "	0.64 lb	-	00683264770003

specifications - characteristics

color	copper
materials	copper (CW024A (UNS C12200))
finishing	none
shape	straight
connection type	press (V)
sealing	EPDM


specifications - general

product group	fittings (accessories (fittings))
ETIM class	EC003024 Fitting with 2 connections
country of origin	United States
brand	Apollo
series	ApolloPress
product type	800
unsps	40172612

specifications - technical

max operating pressure liquid	300 psi
min. medium temperature	32 °F
max medium temperature	250 °F

item code	size	d1	DN1	l1	z1	d2	DN2	l2	z2
10075500	1/2"	0.63	1/2"	0.81	0.06	0.63	1/2"	0.81	0.06
10075502	3/4"	0.88	3/4"	0.98	0.07	0.88	3/4"	0.98	0.07
10075504	1"	1.13	1"	0.98	0.07	1.13	1"	0.98	0.07
10077698	1 1/4"	1.38	1- 1/4"	1.10	0.07	1.38	1- 1/4"	1.10	0.07
10077699	1 1/2"	1.63	1- 1/2"	1.50	0.07	1.63	1- 1/2"	1.50	0.07
10077000	2"	2.13	2"	1.65	0.07	2.13	2"	1.65	0.07

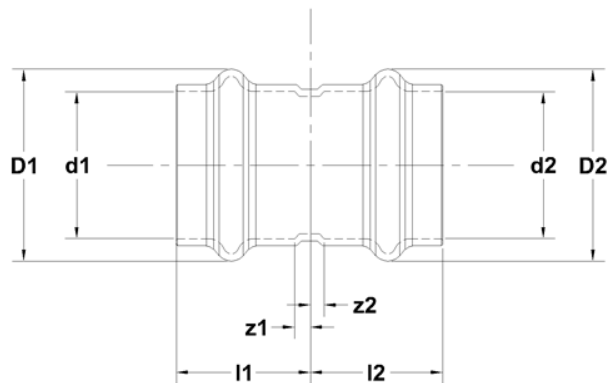

downloads

⬇ 800 - jpg

⬇ ApolloPress Catalog - pdf

⬇ Diagram - png

⬇ ApolloPress Brochure - pdf