


A4 BODY

A4 BODY

Specification: MIFAB's A4 body Series, 5" diameter body with ½" trap seal primer tapping and plug with secondary tapping to receive an optional secondary composite plug. Available in either cast iron, PVC and / or ABS material in various outlet connection sizes (see chart below).

Function: Universal body that is used with all MIFAB F1000, F1100, F1300, F1320, F1420, C1000, C1100, Series of floor and area drains and cleanouts that do not require a water-proofing membrane. The most common application for the A4 bodies is with the C1000 and C1100 cleanouts that require a secondary plug.

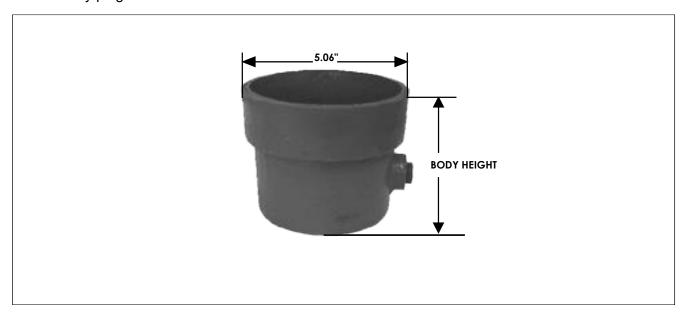

Note: No hub outlet connections are the standard outlet connection provided by MIFAB. No suffix is required to indicate the no hub outlet connection.

PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	PVC (-30) ABS (-31)
2"	4"	4 3/8"	3 5/8
3"	4"	4 3/8"	4 5/16"
4"	4"	4 3/8"	4 11/16"

SUFFIX	OPTIONAL VARIATIONS	
-11	Acid Resistant Coated Expoxy Body	
-13	Galvanized Body	
-30	PVC Connection Body (2", 3" or 4")	
-31	ABS Connection Body (2", 3" or 4")	
-34	Close plug (C1440 Series)	
-90	Threaded side outlet connection (2", 3" or 4"). Not available in ABS / PVC	

SUFFIX	OPTIONAL VARIATIONS
-90NH	No hub side outlet connection (2", 3" or 4"). Not available in ABS / PVC
P	Push On Connection Body (2", 3" or 4")
Т	Threaded Connection Body (2", 3" or 4")
X	Inside Caulk Connection Body (2", 3" or 4")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880