


BRASS PEX F1960 Fittings

Features


- Manufactured to ASTM Standard F1960, CSA B137.5. DZR Brass Material
- For use with PEX-A tubing manufactured to ASTM standard F876-877
- Pressure/Temperature Rating: 250 psi / 180°F
- Lead Free Compliant

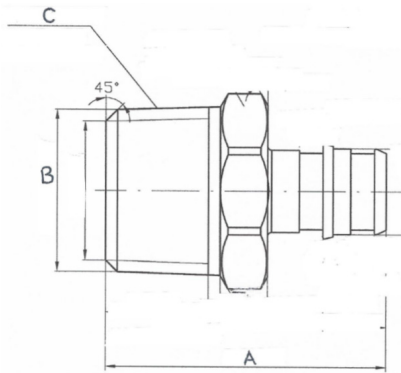

F1960 x Male Adapter


Dimensions in mm*

Part #	Size	Weight/g	A	B	C
WPMA1212-NL	1/2" x 1/2" MIP	42	38.5mm	20.75mm	NPT 1/2-14
WPMA1234-NL	1/2" x 3/4" MIP	64	42mm	26.1mm	NPT 3/4-14
WPMA5812-NL	5/8" x 1/2" MIP	48	42.5mm	20.75mm	NPT 1/2-14
WPMA3412-NL	3/4" x 1/2" MIP	52	44.5mm	20.75mm	NPT 1/2-14
WPMA3434-NL	3/4" x 3/4" MIP	72	48mm	26.1mm	NPT 3/4-14
WPMA3410-NL	3/4" x 1" MIP	109	50.5mm	32.7mm	NPT 1-11.5

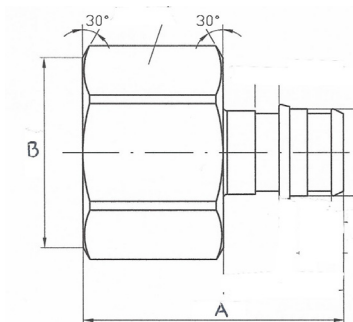


F1960 x Female Adapter

Part #	Size	Weight/g	A	B	C
WPFA1212-NL	1/2" x 1/2" FIP	51	35.5mm	21.5mm	-
WPFA1234-NL	1/2" x 3/4" FIP	72	37mm	27mm	-
WPFA3412-NL	3/4" x 1/2" FIP	58	40.5mm	24mm	-
WPFA3434-NL	3/4" x 3/4" FIP	81	43mm	30mm	-
WPFA3410-NL	3/4" x 1" FIP	140	46mm	38mm	-
WPFA1010-NL	1" x 1" FIP	152	51mm	38mm	-

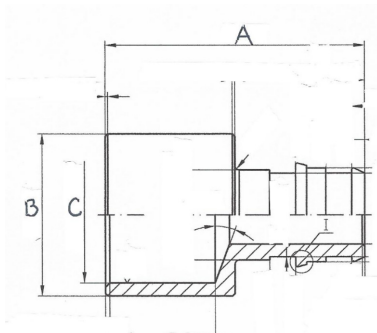


F1960 x Male Sweat Adapter

Part #	Size	Weight/g	A	B	C
WPSMA1238-NL	3/8" x 1/2" SWT	20	30mm	19mm	15.93mm
WPSMA1212-NL	1/2" x 1/2" SWT	25	33mm	19mm	15.93mm
WPSMA1234-NL	1/2" x 3/4" SWT	45	40.5mm	25.5mm	22.28mm
WPSMA3434-NL	3/4" x 3/4" SWT	53	48mm	25.5mm	22.28mm
WPSMA1010-NL	1" x 1" SWT	98	56.5mm	33mm	28.62mm

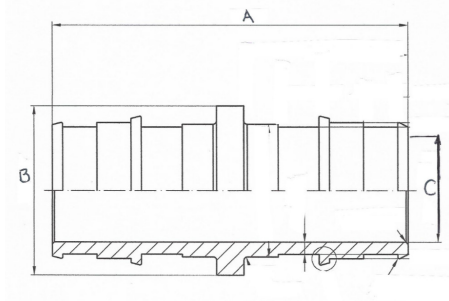


F1960 Coupling

Part #	Size	Weight/g	A	B	C
WPCP0038-NL	3/8"	16	33mm	14mm	6.8mm
WPRC1238-NL	1/2" x 3/8"	24	36mm	14.55mm	9.7mm
WPCP0012-NL	1/2"	29	39mm	18mm	9.7mm
WPCP0058-NL	5/8"	44	47mm	22mm	12.7mm
WPRC3412-NL	3/4" x 1/2"	49	46mm	25mm	15.2mm
WPCP0034-NL	3/4"	58	52mm	25mm	15.2mm
WPRC1034-NL	1" x 3/4"	86	58.5mm	32mm	15.2mm
WPCP0100-NL	1"	102	64.5mm	32mm	20.2mm

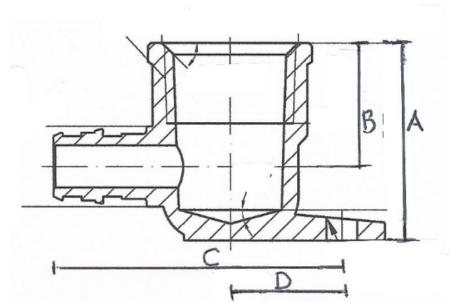


F1960 x FIP Drop Ear

Part #	Size	Weight/g	A	B	C	D
WPDL0012-NL	1/2" x 1/2" FIP	80	32mm	20mm	50mm	18.5mm
WPDL0034-NL	3/4" x 3/4" FIP	165	36mm	23mm	64.5mm	21.5mm

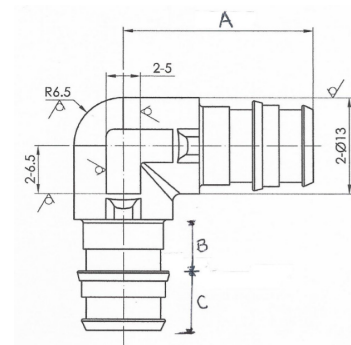


F1960 Elbow

Part #	Size	Weight/g	A	B	C
WPLN0038-NL	3/8"	29	25mm	7mm	8mm
WPLN0012-NL	1/2"	53	30mm	8mm	10mm
WPLN0058-NL	5/8"	71	35.5mm	10mm	12mm
WPRL3412-NL	3/4" x 1/2"	61	33mm	11mm	13mm
WPLN0034-NL	3/4"	91	40mm	11mm	13mm
WPLN0100-NL	1"	178	50mm	14mm	16mm

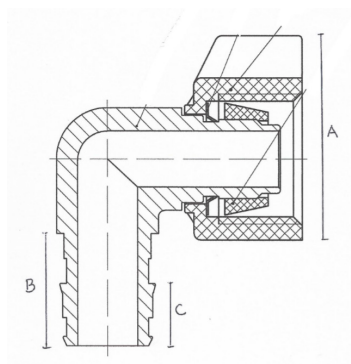


F1960 x Swivel Elbow

Part #	Size	Weight/g	A	B	C
WPFSL1212-NL	1/2" x 1/2" FIP	58.5	-	18mm	10mm
WPFSL3434-NL	3/4" x 3/4" FIP	92.5	-	24mm	13mm

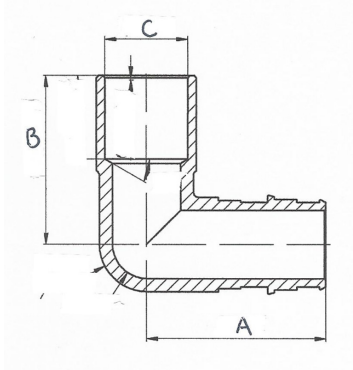


F1960 x Male Sweat Elbow

Part #	Size	Weight/g	A	B	C
WPMSL1212-NL	1/2" x 1/2" SWT	49	30mm	28mm	12.7mm
WPMSL1234-NL	1/2" x 3/4" SWT	65.5	30mm	32.5mm	18.5mm
WPMSL5834-NL	5/8" x 3/4" SWT	74	35mm	24.5mm	19mm
WPMSL3434-NL	3/4" x 3/4" SWT	91.5	40mm	37.5mm	18.5mm

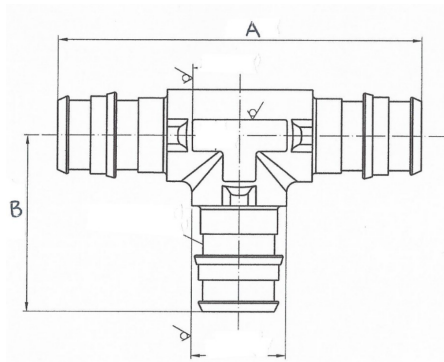

F1960 Tee

Part #	Size	Weight/g	A	B	C
WPTE0038-NL	3/8"	39	50mm	25mm	-
WPTE0012-NL	1/2"	72	64mm	28mm	-
WPTE0034-NL	3/4"	122	83mm	36.5mm	-
WPTE0100-NL	1"	240	104mm	45.5mm	-
WPRT1213-NL	1/2 x 1/2 x 3/4	81	99mm	36.5mm	-
WPRT3411-NL	3/4 x 1/2 x 1/2	78	65.6mm	33mm	-
WPRT3413-NL	3/4 x 1/2 x 3/4	100	72mm	39mm	-
WPRT3431-NL	3/4 x 3/4 x 1/2	90	81mm	40.5mm	-
WPRT3410-NL	3/4 x 3/4 x 1	151	86mm	46mm	-
WPRT1013-NL	1 x 1/2 x 3/4	140	78mm	43mm	-
WPRT1121-NL	1 x 1/2 x 1	185	86mm	49mm	-
WPRT1031-NL	1 x 3/4 x 1/2	128	78mm	37mm	-
WPRT1033-NL	1 x 3/4 x 3/4	145	84mm	43mm	-
WPRT1341-NL	1 x 3/4 x 1	190	92mm	49mm	-
WPRT1112-NL	1 x 1 x 1/2	156	84mm	42mm	-
WPRT1134-NL	1 x 1 x 3/4	177	90mm	45mm	-

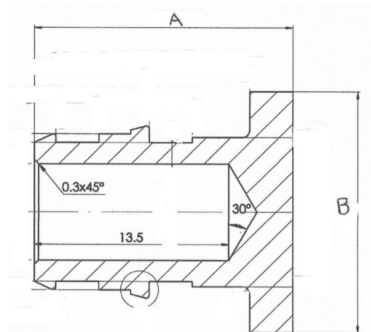

F1960 Plug

Part #	Size	Weight/g	A	B	C
WPPL0038-NL	3/8"	13	18mm	17mm	-
WPPL0012-NL	1/2"	19	21mm	18mm	-
WPPL0034-NL	3/4"	41	28mm	25mm	-
WPPL0100-NL	1"	74	34.5mm	32mm	-