

ApolloPress 90° elbow – drop ear (P x FPT)



group: 8707-3-5 category: fittings product line: Apollo ApolloPress

applications

potable water, heating, cooling,
steam, compressed air, sprinkler,
vacuum

segments

fire protection , utility , industry

approvals

CRN , FM , IAPMO/ANSI/CAN Z1117
, ICC LC1002 , NSF/ANSI 372 ,
NSF/ANSI 61 , UL , ULc

assortment

item code	size	dimensions	weight	packaging	gtin + upc
10075367	1/2" x FPT3/8"	1.96x3.77x2.59 "	0.46 lb	-	00683264753679
10075366	1/2" x FPT1/2"	1.35x2.71x2.12 "	0.27 lb	-	00683264753662
10075368	3/4" x FPT3/4"	1.62x3.28x2.34 "	0.46 lb	-	00683264753686

specifications - characteristics

color	copper, brass
materials	copper, brass (CW024A (UNS C12200), C27451 (lead-free))
finishing	none
shape	Elbow, reducer (90°)
connection type	press (V), FPT - female thread conical (NPT)
sealing	EPDM

specifications - general


product group	fittings
ETIM class	EC003099 Wall plate
country of origin	United States
brand	Apollo
series	ApolloPress
product type	8707-3-5
unsp	40172812

specifications - technical

max operating pressure liquid	300 psi
min. medium temperature	32 °F
max medium temperature	250 °F

dimensions

item code	size	d1	DN1	l1	z1	d2	DN2	l2	z2	slw2	radius	angle
10075367	1/2" x FPT3/8"	0.63	1/2"	2.06	1.21	0.68	3/8"	0.71	0.46	1	0.75	90
10075366	1/2" x FPT1/2"	0.63	1/2"	2.19	1.34	0.84	1/2"	0.88	0.57	1.1	0.75	90
10075368	3/4" x FPT3/4"	0.88	3/4"	2.59	1.70	1.05	3/4"	1.02	0.67	1.26	1.05	90

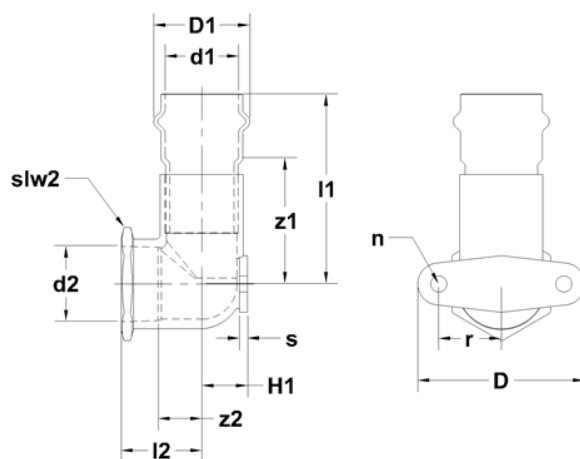

downloads

⬇ 2486270 - jpg

⬇ ApolloPress Catalog - pdf

⬇ Diagram - png

⬇ ApolloPress Brochure - pdf